

# Tubular Brass

## Model 528-CA

For most tubs 14" - 16" high

## Model 538-CA

For most tubs up to 24" high

### Sturdy 1.5" 17g or 20g Tubular Brass Slip-Joint Assembly

#### SPECIFICATIONS

##### FEATURES:

- Sturdy all-brass construction
- No plastic parts
- Designed for heavy-duty use in hotels, motels, and rental property

##### APPROVALS:

- Manufactured in compliance with ASME A112.18.2-2005/CSA B125.2-2005.

##### OPERATION:

- Turn overflow plate clockwise to close drain and counter-clockwise to open drain.

##### THREAD SIZE (Strainer Body and Drain Elbow):

- 1 $\frac{1}{2}$ " – 11 $\frac{1}{2}$ " NPSM (Coarse Thread)
- 1.865" Major Diameter (outside thread diameter)
- 11.5 threads per inch

##### PIPING: 17-gauge or 20-gauge brass

##### OPTIONS:

- Brass Ferrules (add code "F" to part number)
- New York Lay-Down Tee (add code "NY" to part number)
- Slip-'N-Solder (no compression slip joints; add code "U")
- Special lengths available:
  - Overflow extension (add code "EXlength")  
example: EX6
  - Drain extension (add code "Dlength") example: D4
  - For 17-gauge Brass add feature -17G

##### FINISHES:

Tub Closure:	Cable Stopper
BO-Bone	•
BN - Brushed Nickel	•
BS - Biscuit	•
BZ - Oil-Rubbed Bronze	•
CB - Chrome Brushed	•
CP - Chrome Plated	•
NP - Nickel Polished	•
PB - Polished Brass	•
WH - White	•
WI - Wrought Iron (Matte Black)	•



Both models available in 17-gauge brass with an additional charge.

To order 17-gauge:

ADD "-17G" to part number.

Example: 538-CA-BRS-CP-17G

See price list for complete item numbers and available options.


When ordering, please specify complete item number and any applicable option codes.

**WATCO**



For More Information Contact:  
**WATCO Manufacturing Company**  
1220 South Powell Road  
Independence, MO 64057-2724  
Ph. 816-796-3900 • FAX 816-796-0875  
[www.watcomfg.com](http://www.watcomfg.com)


# 528-CA/538-CA Series Parts List

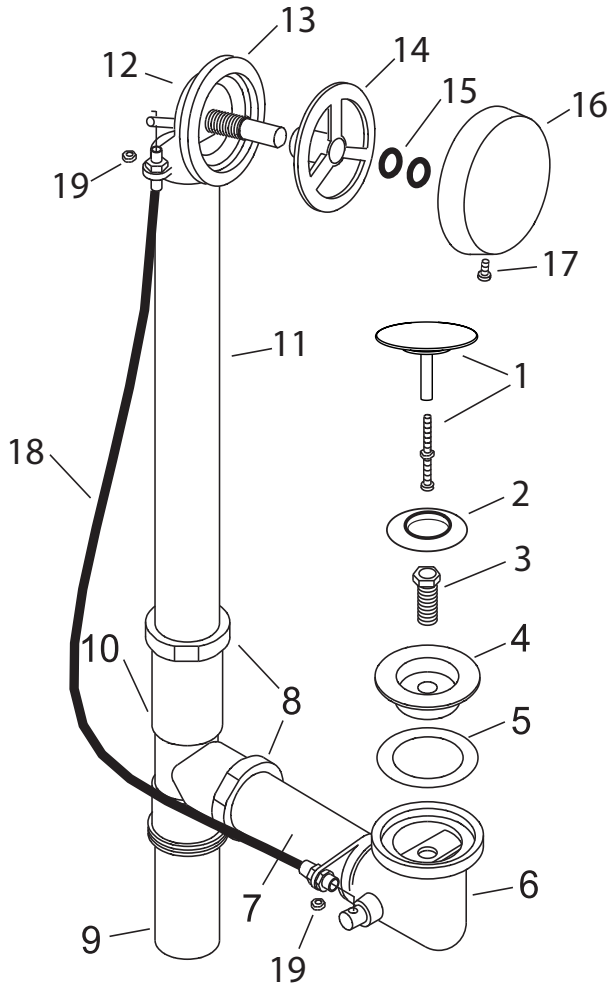

Item	Part #	Description
1	20065 *	Cable Full-Cover Stopper assembled with
	(20110)	adjusting screw and
	(20120)	adjusting nut
2	11507	Cable Faceplate
3	20040	Cable Overflow Elbow Retainer Nut
4	20080 *	Cable Strainer Body
5	20130	Cable Drain Ell Washer
6	20085	Cable Drain Elbow Assembly
7	20GA-4.75	528: DE Pipe, 20g Brass, 1.5" x 4.75"
	17GA-4.75	528: DE Pipe, 17g Brass, 1.5" x 4.75"
	20GA-6.75	538: DE Pipe, 20g Brass, 1.5" x 6.75"
	17GA-6.75	538: DE Pipe, 17g Brass, 1.5" x 6.75"
8	41580	Brass Slip Nut and
	11583	Slip Joint Polywasher, 1.5"
9	20GA-3.5	Tail Piece, 20g Brass, 1.5" x 3.5"
	17GA-3.5	Tail Piece, 17g Brass, 1.5" x 3.5"
10	44001	Tee, Brass
11	20GA-15.62	528: OF Pipe, 20g Brass, 1.5" x 15.625"
	17GA-15.62	528: OF Pipe, 17g Brass, 1.5" x 15.625"
	20GA-23.62	538: OF Pipe, 20g Brass, 1.5" x 23.625"
	17GA-23.62	538: OF Pipe, 17g Brass, 1.5" x 23.625"
12	20035	Cable OF Ell Assembly with 20041 turning pin
13	20100	Cable Overflow Ell Washer
14	20020 *	Overflow Mount with prongs
	20021 *	Cable Mounting Bracket without prongs
15	11134	Cable O-Ring: AS 568A-204 (two Required)
16	20030 *	Cable Overflow Plate
	20140	Cable Overflow Plate Locking Screw
18	20156	528: Cable Sleeve Ass'y., brass threads, 22.125"
	20160	538: Cable Sleeve Ass'y., brass threads, 31.0"
19	20122	Nut for Cable Wire

## Roughing-In Dimensions:

### Cable Drains

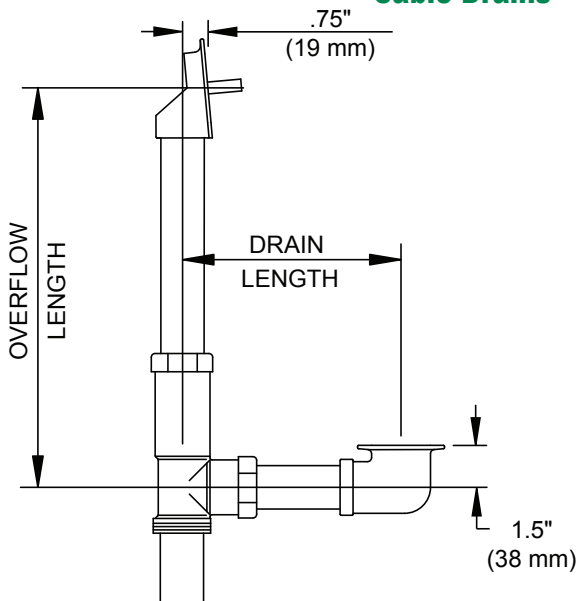

### Model 528-CA:

Overflow length plus drain length cannot exceed 28 inches.

STANDARD: Overflow Length = 20 inches  
Drain Length = 8 inches

### Model 538-CA:

Overflow length plus drain length cannot exceed 38 inches.

STANDARD: Overflow Length = 28 inches  
Drain Length = 10 inches

**Please Note:** If lengths needed are not within the standards above, lengths needed must be clearly noted on order.